


CASQUILLO CORTE DIN-9845 LISO FORMA A CON VALONA FORMA B

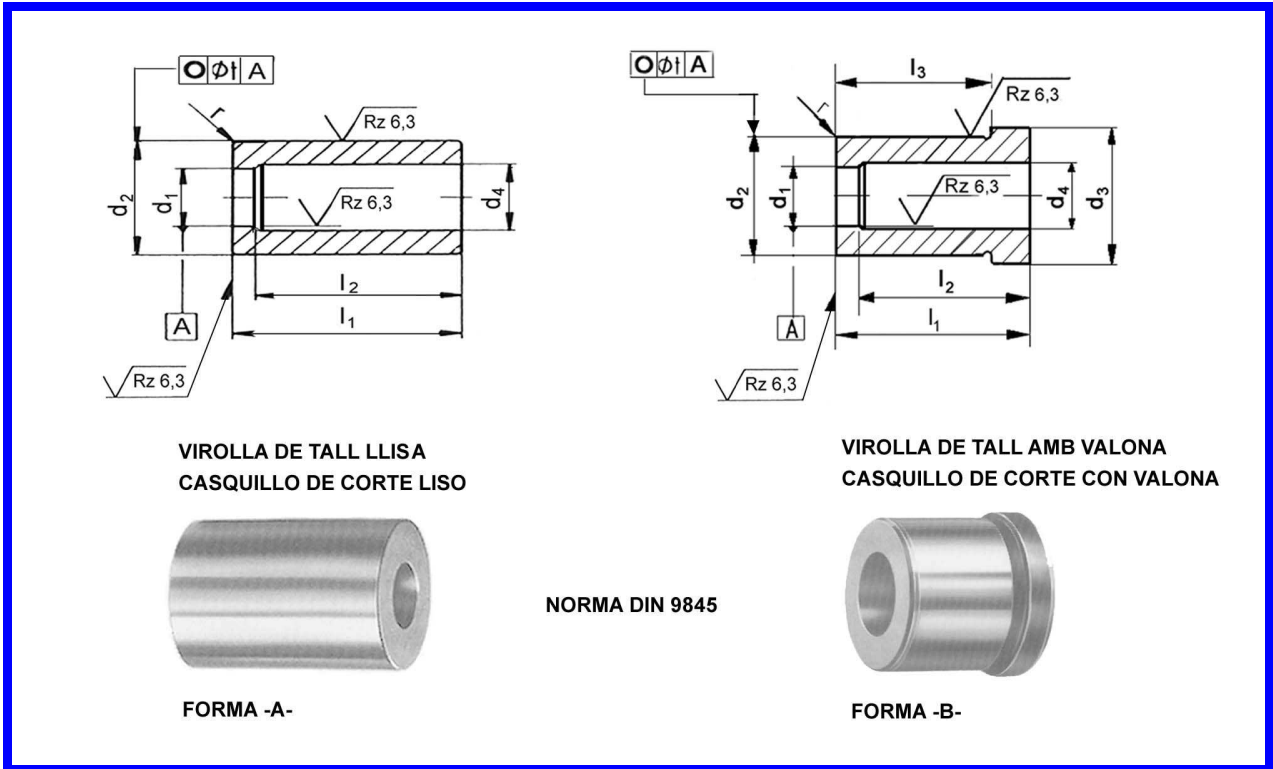

MATERIAL:

- HWS - Acero al 12% CROMO 1.2080
- WS - Acero F-522
- HSS - Acero rápido 1.3343

DUREZAS:

- 60-62 HRc.
- 60-62 HRc.
- 62-64 HRc.

EJECUCIÓN: TEMPLADOS Y RECTIFICADOS, DIÁMETRO INTERIOR H-8
 DIÁMETRO EXTERIOR n-6 para tipo-A- y k-6 para tipo-B-

d ₁ H-8	Escalonado en mm.	d ₂ Tipo-A : n-6 Tipo-B : k-6	d ₃	d ₄ ±0,1	Cortos			Largos			r	t
					l _{1+0,5}	l ₂	l ₃	l _{1+0,5}	l ₂	l ₃		
1.0	0.10	5.00	7.00	d ₁ +0.3	20.0	18.0	16.0	---	---	---	0.3	0.01
1.10 a 2.0		6.00	8.00	d ₁ +0.3	20.0	17.0	16.0	28	25.0	24.0	0.3	
2.10 a 3.0		7.00	9.00	d ₁ +0.5	20.0	17.0	16.0	28	25.0	24.0	0.4	
3.10 a 4.0		8.00	10.00	d ₁ +0.5	20.0	17.0	16.0	28	25.0	24.0	0.4	
4.10 a 5.0		10.00	12.00	d ₁ +0.7	20.0	16.0	16.0	28	24.0	24.0	0.4	
5.10 a 6.0		12.00	14.00	d ₁ +0.7	20.0	16.0	16.0	28	24.0	24.0	0.6	
6.10 a 8.0		15.00	17.00	d ₁ +0.7	20.0	16.0	16.0	28	24.0	24.0	0.8	
8.10 a 10.0		18.00	20.00	d ₁ +1.0	20.0	16.0	16.0	28	24.0	24.0	0.8	
10.10 a 12.0		22.00	24.00	d ₁ +1.0	20.0	15.0	16.0	28	23.0	24.0	0.8	
12.10 a 15.0		26.00	28.00	d ₁ +1.0	20.0	15.0	16.0	28	23.0	24.0	0.8	
15.50 a 18.0	0.50	30.00	32.00	d ₁ +1.0	----	----	----	28	23.0	24.0	1.0	0.02

BAJO DEMANDA OTROS DIÁMETROS.

